



▶ **Solar Panels with World Class Quality and Performance**

▶ **Manufactured with Leading Edge Technology Imported from the United States**

▶ **Main Specifications:**

- Nominal power output above 55 watts (P_{max})
- Panel size exceeds 1 square meter : 787 mm X 1397 mm
- TÜV and UL Norms



• IEC Compliance :



IEC 61646: Thin-film terrestrial photovoltaic (PV) modules - design qualification and type approval
 IEC 61730: Photovoltaic module safety qualification (Safety Class II)

- Guaranteed 90% of specified min Power for 10 years, 80% for 25 years
- 5 Years guarantee on the product

▶ **Proven Manufacturing Quality and Capability**



- Since 1993
- ISO Certified Factory

▶ **Global Standards for Esthetics and Ease of**

Installations

- Anodized optional Aluminum frame
- Pre-installed connectors
- Integrated bypass diodes

Unit: mm 20/28/35±2

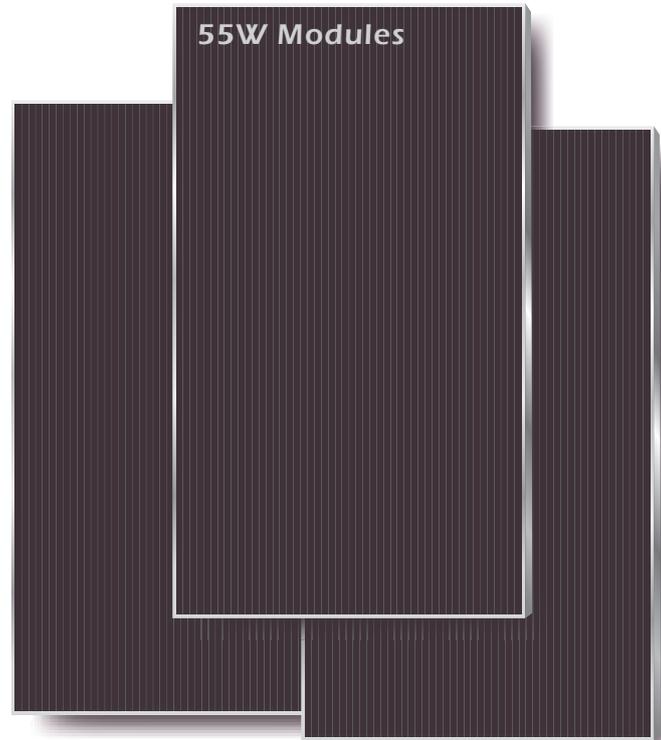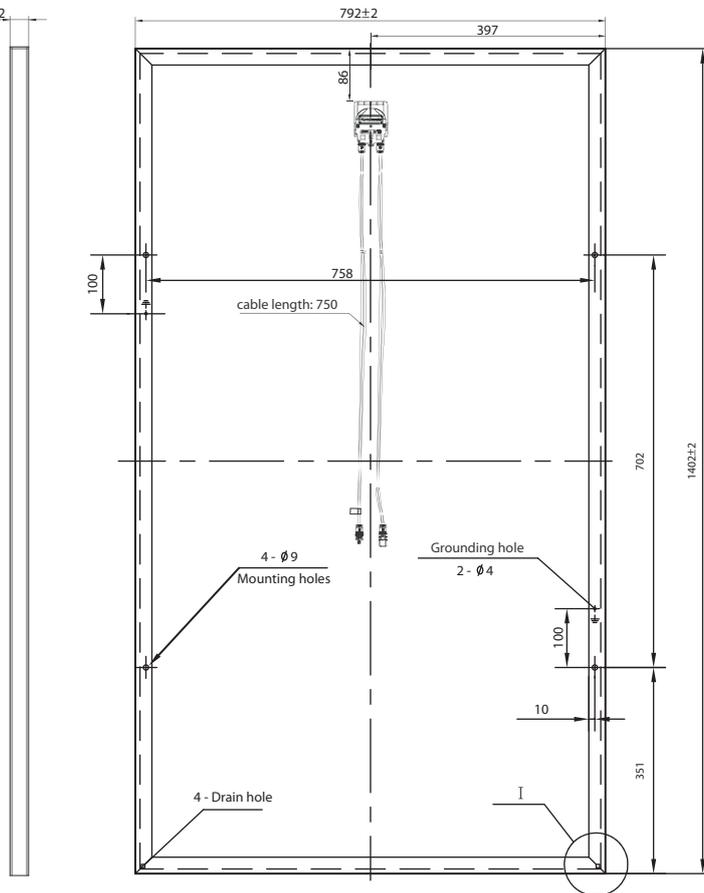

Product Code:
QS55DGF (Framed)
QS55DGU (Unframed)

Technical Datasheet

Electrical Data

The electrical specifications shown below are stabilized values measured at Standard Report Conditions: 1000W/m² irradiance, AM1.5 spectrum at 25 degrees °C, while Voc or Isc can be customized.

Specifications	Unit	Stabilized Values	Initial Values from Stock
Nominal Power (P_{max})	W	55	Approx. 64.8
Open Circuit Voltage (V_{oc})	V	79.0	Approx. 81.4
Short Circuit Current (I_{sc})	A	1.18	Approx. 1.22
Voltage at Pmax (V_{pm})	V	60.2	Approx. 64.5
Current at Pmax (I_{pm})	A	0.91	Approx. 1.00
Max. System Voltage	V	1000	
Dimensions	mm	(1402±2.0) x (792±2.0) (framed)	
Thickness	mm	20/28/35±2 (framed) 25±2 (unframed)	
Weight	kg	18.9/19.6/19.9 (framed) 17.9 (unframed)	

The rated power may vary by $\pm 5\%$ and all other electrical parameters by $\pm 10\%$.

Product guarantee

5 years.

Warranty on output

90% of the specified minimum output of the module for a 10-year period, 80% of the specified minimum output of the module for a 25-year period after shipment from QS Solar.

Temperature coefficients

Power	- 0.21 %/K
Open-circuit voltage	- 0.31 %/K
Short-circuit current	+ 0.07 %/K

Limits

System voltage	1000 VDC
Maximum reverse current	3 A
Operating module temperature	-40°C to +85°C
Typical operation temperature	approx. 20°C to 25°C

Qualifications

According to IEC 61646, IEC61730. CE , TÜV and UL conformity.